


## Machine guard door

The folding door is a very flexible door that takes little space in open position but still creates a large opening space with free access in height.

The folding door is limited to the ST30 mesh panels of 2050 mm height and the widths can be combined using the standard panel sizes x3, from 700 mm to 1500 mm creating an opening from 2100 mm to 4500 mm. The door is based on the 60x40 posts or can be built with the 80x80 post for more stability. The folding door is supplied as separate panels, posts and door kit for assembly on site.

Depending on the risk assessment, you choose the preferable lock for your door. The folding door can be equipped with the Troax Safe Lock that fits many safety switches.

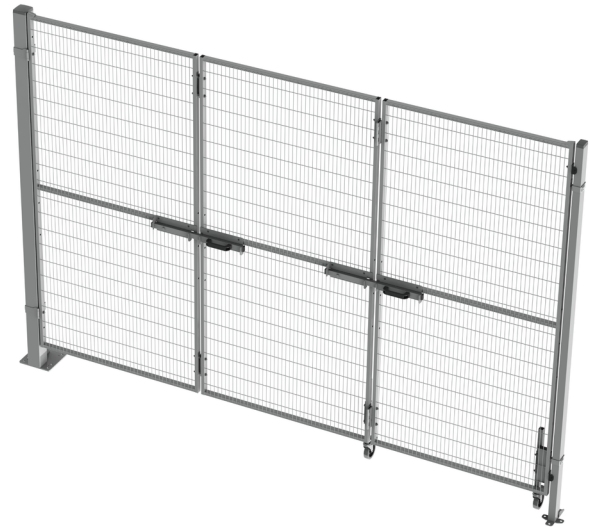

### FACTS


#### Door dimensions, system height 2200 mm

Panel Height (mm)	Width (mm)
2050	700+700 + 700/800/1000/1200/1500
2050	800+800 + 700/800/1000/1200/1500
2050	1000+1000 + 700/800/1000/1200/1500
2050	1200+1200 + 700/800/1000/1200/1500
2050	1500+1500 + 700/800/1000/1200/1500

The two panels closest to the hinge shall have the same size.

Standard colour for the mesh panels are grey RAL 7037 and black RAL 9005. Standard colour for the 60x40 posts are grey RAL7037, black RAL9005 or yellow RAL1018. Standard colour for the 80x80 posts is grey RAL 7037.

Doors can be made in the colour of your choice.

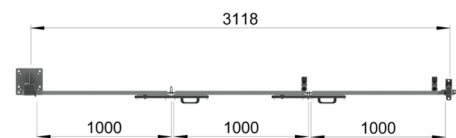

### LOCK OPTIONS

Safe Lock (Kit 5030)

Safe Lock ES (Kit 5040)

