


Machine guard door

The hinged door can be built from our mesh, polycarbonate or steel panels to fit your chosen machine guard system. Use the standard panel heights 2050 mm or 1250 mm in up to 6 widths, or combine the panels to get your requested size. The single hinged door can be ordered pre-assembled from factory, or as separate panels, posts and door kit for assembly on site.

Depending on the risk assessment, you choose the preferable lock for your door; Magnetic Lock, Cylinder Lock or Safe Lock. The single hinged door can also be equipped with a Panic Bar or Push Pad solution.

Troax machine guard systems are so flexible you can at any time choose to convert a panel in your system to a door, just by adding our door kit.

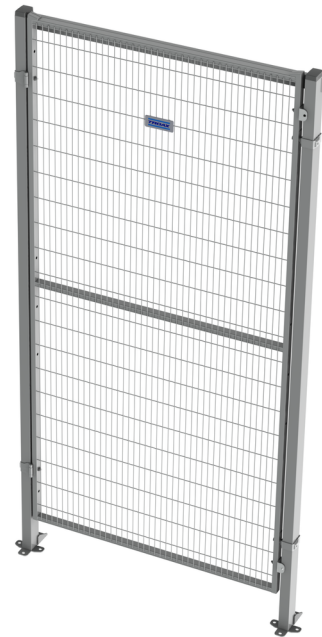


FACTS

Door dimensions, system height 1400 mm

Panel Height (mm)	Width (mm)
1250	700
1250	800
1250	1000
1250	1200
1250	1500

Door dimensions, system height 2200 mm

Panel Height (mm)	Width (mm)
2050	500
2050	700
2050	800
2050	1000
2050	1200
2050	1500



Standard colour for posts are grey RAL7037, black RAL9005 or yellow RAL1018. Standard colour for mesh panels are RAL 7037 and RAL 9005.
Doors can be made in the colour of your choice.

LOCK OPTIONS

Magnetic Lock (Kit 6400)



Cylinder Lock (Kit 5710)



Safe Lock (Kit 5010)

