


## Door UX 550 Cylinder

The Troax Safe door is designed to be used with UX 550 mesh panel system and is suitable for storage areas in need of highest level of protection and is part of a system with specially adapted installation fittings. The System is used in areas which are particularly susceptible to break-in attempts. The door leaf has a 30x20 mm steel tube frame and two horizontal tubes to create strength and stability. The 50x50 mesh aperture also makes it virtually impossible for a hand to reach through the mesh. Doors are supplied pre-assembled, ready for installation.

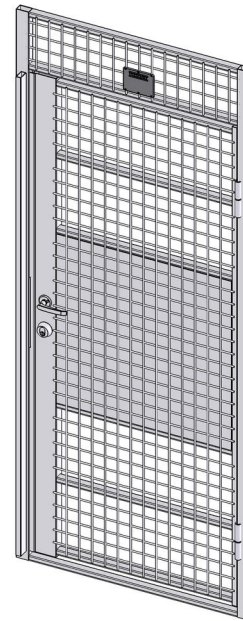

### FACTS


#### Door Dimensions ASSA Cylinder

Height (mm)	Dooropening height (mm)	Width (mm)
2200	1970	900

#### Door Dimensions Euro Cylinder

Height (mm)	Dooropening height (mm)	Width (mm)
2200	1970	900

Mesh size: 50x50 mm, tube doorblade 30x20x1,5 mm, wire 5x5 mm

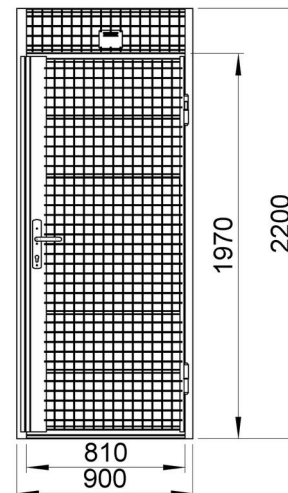

### ACCESSORIES

#### Profiles

- Single profile UX 550 L=2160
- Join profile UX 550 L=2160
- Corner profile UX 550 L=2160 outwards
- Corner profile UX 550 L=2160 inwards
- Wall profile UX 550 L=2160
- Join profile UX 550 L=2160 cyl. door
- Cable protection Door UX 550AC 900

