


## Single Hinged door UX 450 Panic Bar

Employers always have the responsibility of creating a working environment that is safe and secure for employees. Troax can help companies achieve this with a safety solution for building exit routes called the Panic Bar. The Troax Panic Bar meets the requirements of the new norm EN1125 and is designed for use with hinged single doors of our Caelum mesh partitioning system.

The Panic Bar assembles onto the door in a similar way to Troax Caelum doors fitted with Euro profile cylinder locks. In some circumstances existing Caelum doors can be retrofitted with the Panic Bar.

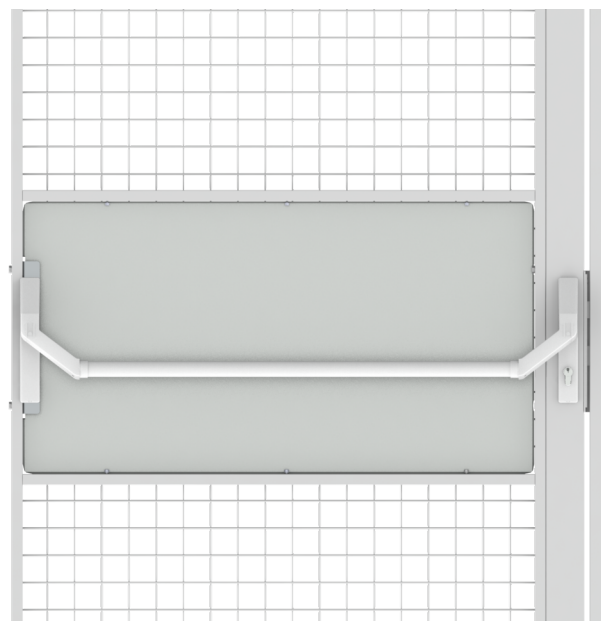

### FACTS


#### Dimensions doors

Door Height (mm)	Door Width (mm)
2200	1000
2200	1200

The Troax Panic Bar has been tested and approved in accordance with the European Standard EN1125. This means that the lock is tested under demanding conditions to ensure that it can handle an emergency situation.

#### Lock options

Eurocylinder

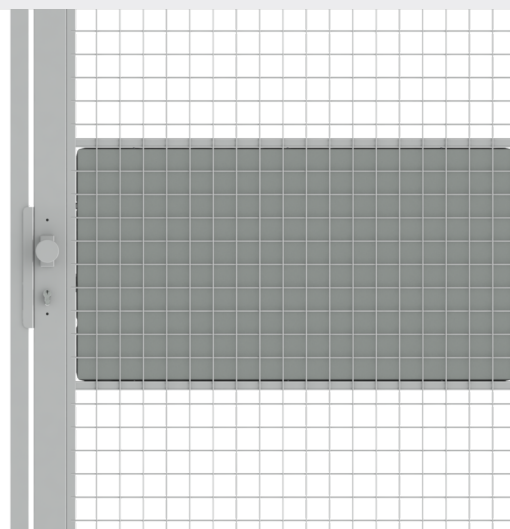

### ACCESSORIES

Key cylinder single euro  
Key cylinder double euro

