

Automatic machine guard door

The automatic sliding door is equipped with an operating motor SL500 from Besam ASSA ABLOY Entrance Systems. For a double sliding door, we offer two sizes as standard solutions with the PC or steel sheet panels. The door can be built in many sizes, creating an opening width from 1934 mm up to 5930 mm when combining the single motors and using our standard panel solutions.

The Besam SL500 operating motor complies with the requirements of the Machinery Directive and the door can be equipped with a non-contact safety switch to reach PLe level in a machine guard installation. Choose among the options for number of presense sensors, electromechanical locking device and remote control solutions to operate your door.



FACTS

Door dimensions, opening width COW: 1934 mm


PC Panels:	Posts
4 units 2050x1000 mm	4 units 80x80 mm

Besam Operating Motor SL500 Single 1934 dbl opening
Kit Besam double door, Guide Rail, Tube

Door dimensions, opening width COW: 2334 mm

PC Panels	Posts
4 units 2050x1200 mm	4 units 80x80 mm

Besam Operating Motor SL500 Single 2334 dbl opening
Kit Besam double door, Guide Rail, Tube

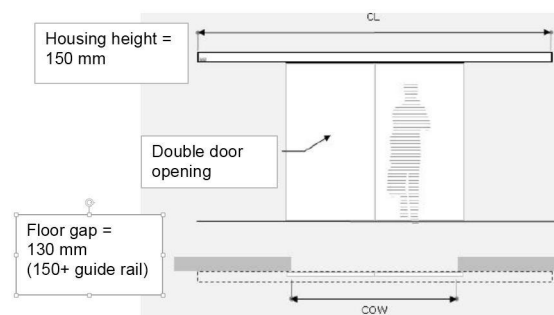

OPTIONS

Safety Switch	Battery Emergency Unit	Electromechanical Locking Device
Guardmaster Sensaguard 440N-Z21SS2HN	12 V	LD: Locked without power
	24 V	LDP: Locked with power

Presence sensor: choose from 0-2 presense sensors depending on the use of the door